

HITEK POWER PSM10 SERIES

PRECISION SCIENTIFIC POWER SUPPLY MODULES



The HiTek Power® PSM10 series is a range of versatile high voltage component power supply modules equally suited to both laboratory and development work, as well as for specification in OEM equipment. Powered from 24 VDC, these units allow full range control and monitoring of voltage and current via 0 to 10 V analog signals and inhibit signal input. Positive or negative polarity models up to 15 kV are available with customer-defined derivatives upon request.

FEATURES

- 10 W output power
- V and I control
- V and I monitor
- Output inhibit
- High stability
- Short circuit and flashover protected
- RoHS compliant to EU directive 2015/863 and SI 2012 No.3032
- CE and UKCA marked for LV directive 2014/35/EU, SI 2016, No.1101

TYPICAL APPLICATIONS

- Photomultipliers
- Gamma cameras
- Image scanners
- Spectroscopy
- Scintillation counters
- Microchannel plates
- Piezo crystal devices
- Ultrasonic transducers
- Electron beam deflection
- Electrorheological fluids
- Electrostatic lenses (SEMs and STMs)

ELECTRICAL SPECIFICATIONS

| | |
|-------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Output Power | 10 W at full rated output voltage and current |
| Output Voltage | 10 V to 1 kV to 150 V to 15 kV max depending on model |
| Output Current | 667 μ A to 10 mA max depending on model |
| Input Voltage | 24 VDC |
| Input Current | 1 A max |
| Output Polarity | Positive or negative to order |
| Line Regulation | < 0.005% change in output voltage over range 22 to 26 V at rated output power |
| Voltage Load Regulation | < 0.005% change in output voltage for change in output current from 0 to max output current at rated output voltage |
| Ripple | 20 mV to 1 V peak to peak depending on model |
| Voltage Control | Voltage demand: 0 to 10 V for 0 to max output voltage \pm 2% |
| | Input impedance: 22 k Ω (\pm 1%) |
| | Using DAC or OP-AMP: connect output of Digital to Analog Converter (DAC) or Operational Amplifier to pin 8 and 0 V to pin 6 |
| | Using a potentiometer and internal reference: connect the high end (clockwise) of potentiometer to pin 9, connect low end (counter clockwise) of potentiometer to pin 6, connect wiper of potentiometer to pin 8 |
| | Using a potentiometer and external 10 V reference: connect the high end (clockwise) of potentiometer to external 10 V reference, connect low end of potentiometer (counter clockwise) to pin 6 and external 10 V reference return, connect wiper of potentiometer to pin 8 |
| | Using single fixed resistor: connect a resistor between pin 9 and pin 8 using the internal impedance (22 k Ω \pm 1%) as potential divider |
| Current Control | Using two fixed resistors: connect a resistor between pin 9 and pin 8, connect an additional resistor between pin 8 and Pin 6. Note: internal impedance 22 k Ω (\pm 1%) |
| | Current demand: 0 to 10 V for 0 to max output current \pm 2% |
| | Note: if left open, circuit supply assumes max current capability |
| | Input impedance: 1 M Ω internal pull-up, to a +15 V rail |
| | Using DAC or OP-AMP: connect output to digital to analog converter (DAC) or operational amplifier to pin 4 and 0 V to pin 6 |
| Voltage Monitors | Using potentiometer and internal reference: connect the high end (clockwise) of potentiometer to pin 9, connect low end (counter clockwise) of potentiometer to pin 6, connect wiper of potentiometer to pin 4 |
| | Using two fixed resistors: connect a resistor between pin 9 and pin 4, connect an additional resistor between pin 4 and pin 6 |
| | Voltage: 0 to 10 V \pm 2% or \pm 100 mV, whichever is greater, for 0 to max output voltage |
| | Output impedance: 10 K Ω \pm 1% |


ELECTRICAL SPECIFICATIONS (CONTINUED)

| | |
|-------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Current Monitors | Current: 0 to 10 V $\pm 2\%$ or ± 100 mV, whichever is greater, for 0 to max output current |
| | Output impedance: 10 K Ω $\pm 1\%$ |
| Inhibit | Disable: 0 to 0.8 V = OFF |
| | Enable: 2.2 to 24 V = ON; Open circuit = ON |
| Stability | < 50 ppm per hour at constant ambient temperature and rated output power after 1 h warmup |
| Temperature Coefficient | < 50 ppm per $^{\circ}\text{C}$ at max output power |
| Operating Temperature | 0 to 50 $^{\circ}\text{C}$ (32 to 122 $^{\circ}\text{F}$) at up to 90% RH non-condensing |
| Storage Temperature | -20 to +70 $^{\circ}\text{C}$ (-4 to 158 $^{\circ}\text{F}$) |
| Altitude | Sea level to 2000 m (6500ft) |
| Reliability | Mean time between failure (MTBF) > 100,000 hours |
| | In accordance with MIL-HDBK-217F |
| Protection | Protected against continuous short circuit and flashover |
| Safety | Meets the requirements of the Low Voltage Directive, 2014/35/EU, SI 2016 No.1101 by complying with BS EN61010-1:2010 when installed as a component part of compliant equipment. Units are CE and UKCA marked accordingly. |
| RoHS | Meets the requirements of EU Directive 2011/65/EU. Delegated directive 2015/863 and SI 2012 No.3032 on the Restriction of use of certain Hazardous Substances in Electrical and Electronic Equipment (RoHS). |

HITEK POWER PSM10 SERIES


MECHANICAL SPECIFICATIONS

| | |
|-------------------|------------------------------------------------|
| Dimensions | See outline drawing |
| Weight | PSM10/102 and PSM10/202 0.4 kg (0.88 lb) |
| | All other models 0.7 kg (1.54 lb) |
| Construction | Fabricated alloy with black painted finish |
| Earthing | Case internally connected to 0 V |
| Output Connection | 600 mm long screened flying lead (see drawing) |

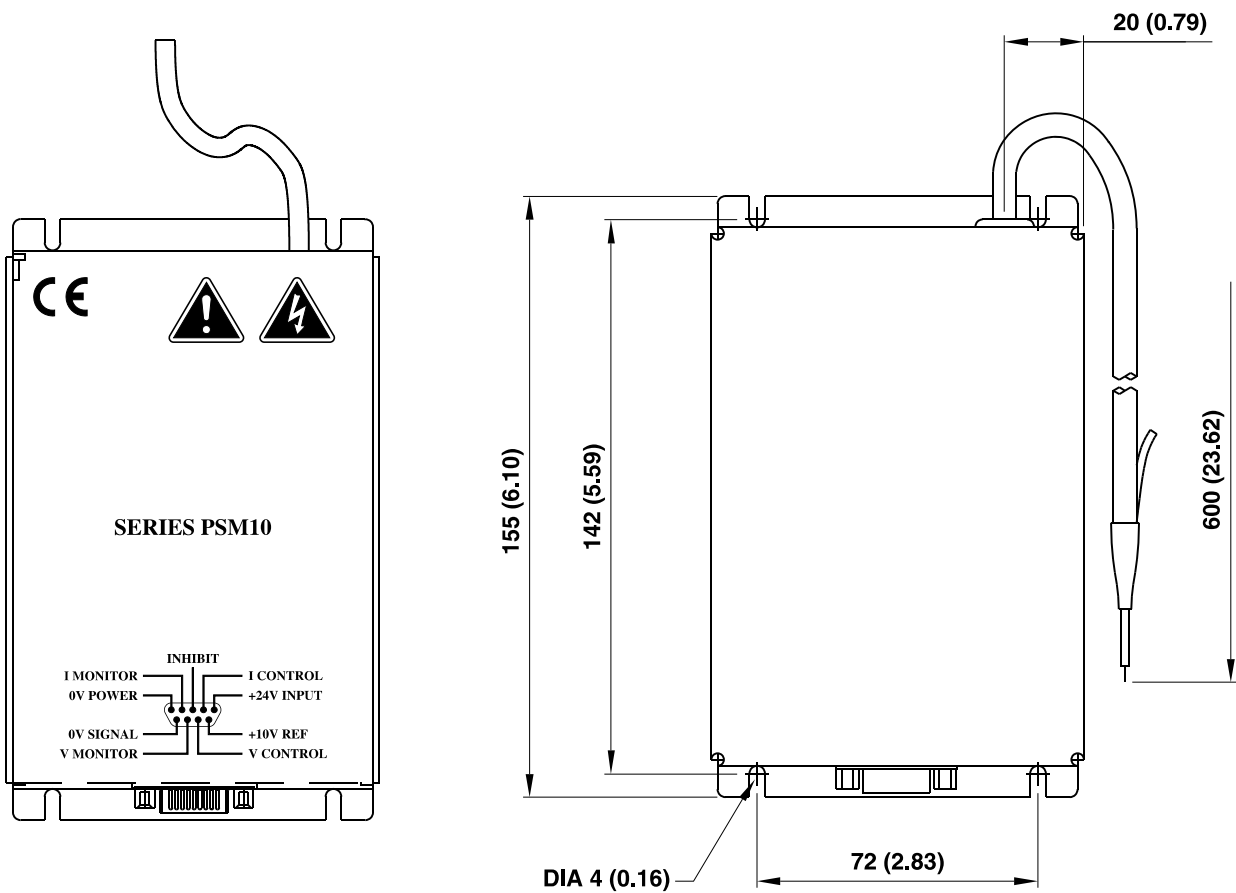


0.4 kg UNIT

**PSM10/102
PSM10/202**

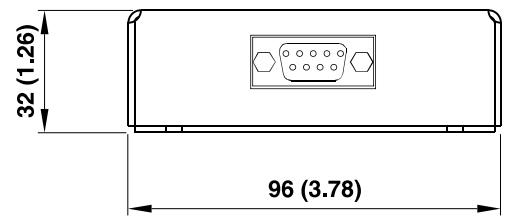


MECHANICAL SPECIFICATIONS (CONTINUED)

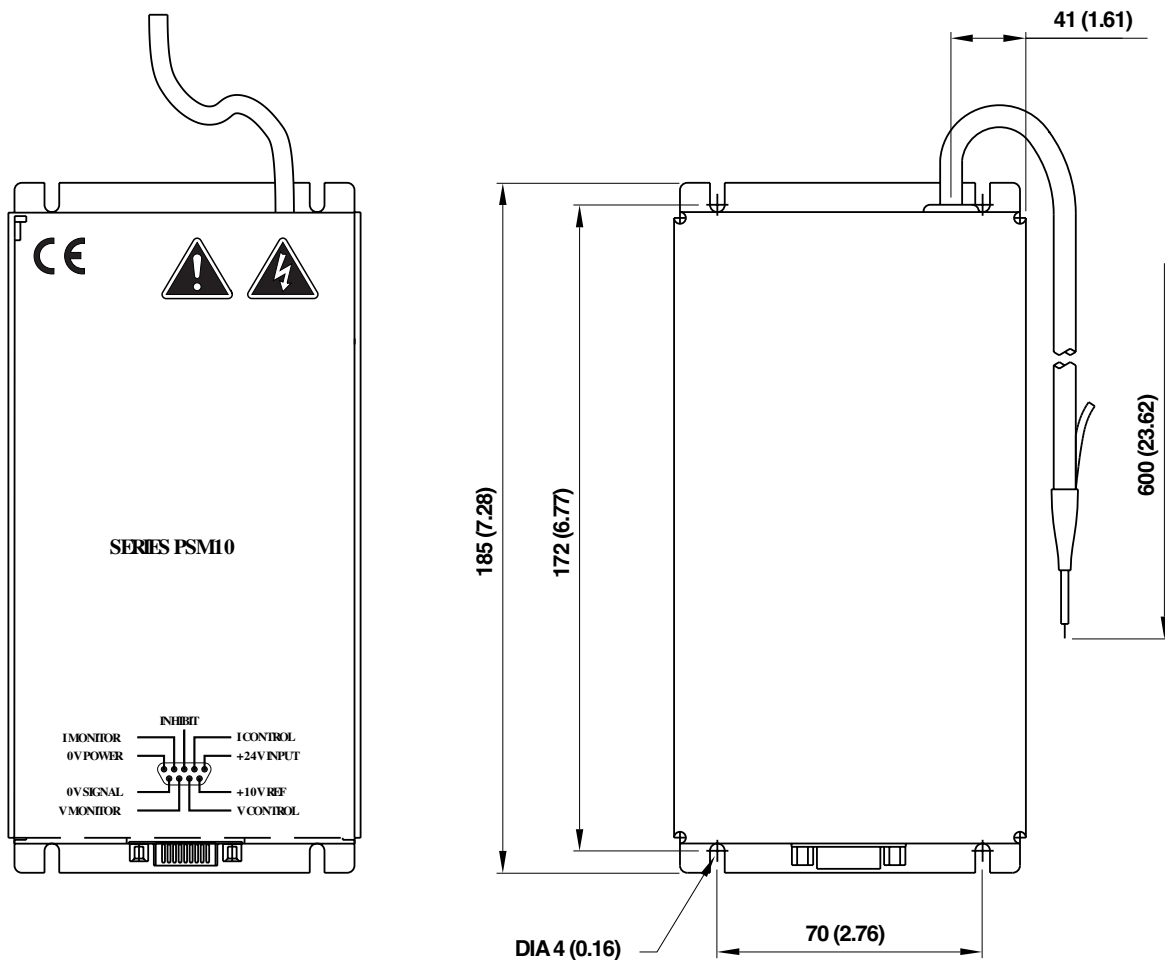


0.7 kg UNIT

PSM10/502
PSM10/103
PSM10/153

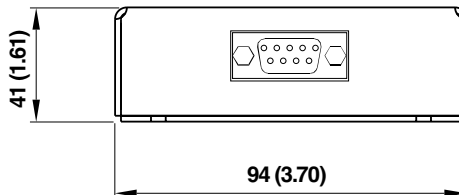

INTERFACE

9-way, male D-type connector fitted to module:

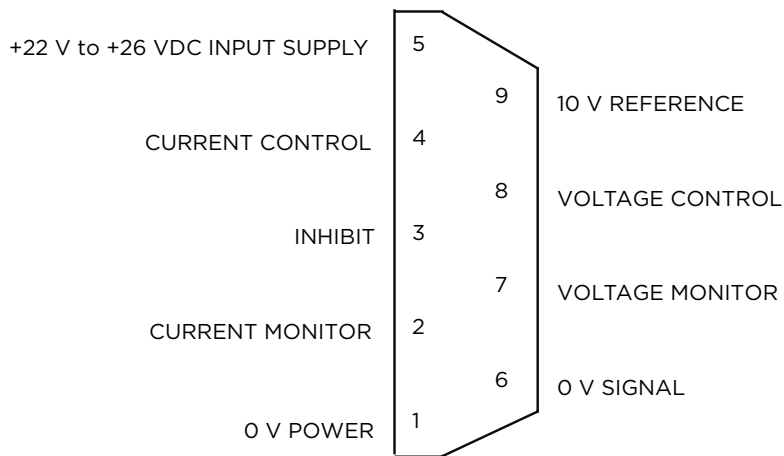

The above pinout diagram is view looking at the connector pins.

ORDERING INFORMATION

For ordering information and to find a solution for your exact requirements, please contact your local Advanced Energy sales representative.



For international contact information,
visit [advancedenergy.com](https://www.advancedenergy.com).

powersales@aei.com (Sales Support)
productsupport.ep@aei.com (Technical Support)
+1 888 412 7832

ABOUT ADVANCED ENERGY

Since 1981, Advanced Energy (AE) has perfected how power performs for its customers. For both end users and OEMs, AE's comprehensive portfolio of standard and custom high voltage components precisely match system specifications to deliver unparalleled energy, quality, and performance. Through close customer collaboration, design expertise, application insight, and world-class support, AE creates successful partnerships and enables customers to push the boundaries of innovation and stay ahead of evolving market needs.

PRECISION | POWER | PERFORMANCE | TRUST



CAUTION:
High Voltage

Read and understand all documentation before you install, operate, or maintain Advanced Energy high voltage power supplies. Follow all safety instructions and precautions to protect against property damage and serious or possibly fatal bodily injury. Never defeat safety interlocks or grounds.

Specifications are subject to change without notice. Not responsible for errors or omissions. ©2024 Advanced Energy Industries, Inc. All rights reserved. Advanced Energy®, AE®, and HiTek Power® are U.S. trademarks of Advanced Energy Industries, Inc.

