


SL Power External Power Supplies

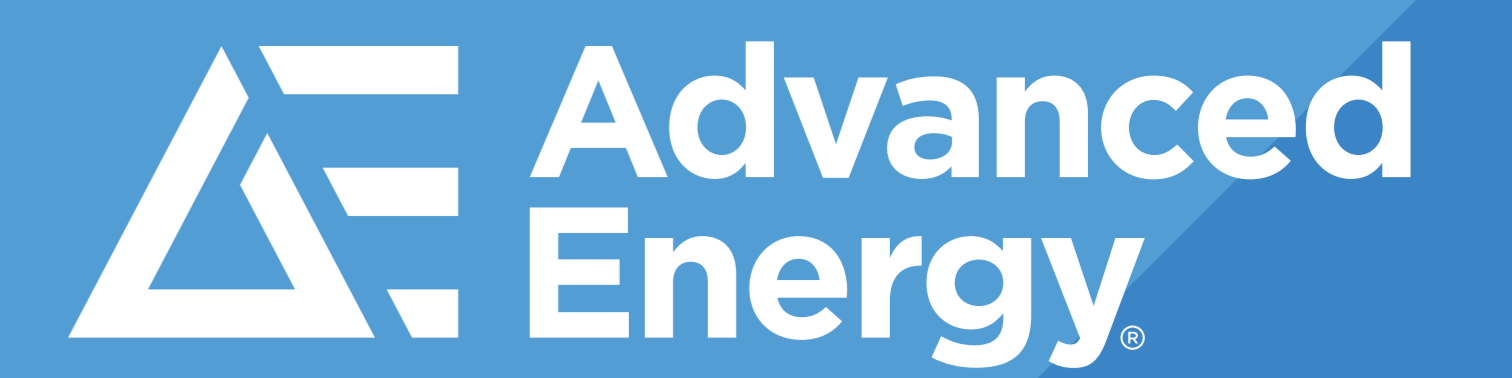

SLE06 **6 W**

100K Hours MTBF
Up to 78% Efficiency
1.67 x 2.89 x 1.21 in.
4.2 to 12 Vdc Models
Medical and ITE Safety Compliant
DoE Level VI & CoC Version 5, Tier 2 Efficiency

ME10/TE10 **10 W**

>1,000K Hours MTBF
>10 Year E-Cap Life
Desk-Top 1.85 x 3.31 x 1.22 in.
Wall-Mount 1.85 x 3.31 x 1.50 in.
>87% Typical Efficiency
5, 5.9, 7.5, 9, 12, 15, 24 Vdc Models
Medical and ITE Safety Compliant

SLE12 **12 W**

100K Hours MTBF
Up to 83% Efficiency
1.19 x 2.99 x 1.90 in.
5 to 24 Vdc Models
Medical and ITE Safety Compliant
DoE Level VI & CoC Version 5, Tier 2 Efficiency

SLE18 **18 W**

100K Hours MTBF
Up to 85% Efficiency
1.18 x 3.47 x 2.24 in.
5 to 24 Vdc Models
Medical and ITE Safety Compliant
DoE Level VI & CoC Version 5, Tier 2 Efficiency

ME20/TE20 **20 W**

>1,000K Hours MTBF
>7 Year E-Cap Life
Desk-Top 1.85 x 3.31 x 1.22 in.
Wall-Mount 1.85 x 3.31 x 1.50 in.
>87% Typical Efficiency
5, 5.9, 7.5, 9, 12, 15, 24, 48 Vdc Models
Medical and ITE Safety Compliant

SLE24 **24 W**

100K Hours MTBF
Up to 87% Efficiency
1.18 x 3.47 x 2.24 in.
7 to 52 Vdc Models
Medical and ITE Safety Compliant
DoE Level VI & CoC Version 5, Tier 2 Efficiency

ME30/TE30 **30 W**

>1,000K Hours MTBF
>8 Year E-Cap Life
Desk-Top 2.13 x 3.76 x 1.22 in.
Wall-Mount 2.17 x 3.78 x 1.32 in.
>87%, Typical Efficiency
5, 9, 12, 15, 12, 18, 24, 48Vdc models
Medical and ITE Safety Compliant

GE30D **30 W** NEW

Dual Output
5.2 x 2.4 x 1.3 in
IEC 62368-1
USB A port + DC output and connector
DoE Level VI & CoC Version 5, Tier 2 Efficiency

SLE36 **36 W**

100K Hours MTBF
Up to 88% Efficiency
1.30 x 3.81 x 1.99 in.
9 to 36 Vdc Models
Medical and ITE Safety Compliant
DoE Level VI & CoC Version 5, Tier 2 Efficiency

ME40/TE40 **40 W**

>1,000K Hours MTBF
>8 Year E-Cap Life
Desk-Top 2.13 x 3.76 x 1.22 in.
Wall-Mount 2.17 x 3.78 x 1.32 in.
>87%, Typical Efficiency
5, 12, 18, 24Vdc models
Medical and ITE Safety Compliant

SLE48 **48 W**

100K Hours MTBF
Up to 88% Efficiency
1.30 x 3.81 x 1.99 in.
9 to 36 Vdc Models
Medical and ITE Safety Compliant
DoE Level VI & CoC Version 5, Tier 2 Efficiency

ME60/TE60 **60 W**

>250K Hours MTBF
>7 Year E-Cap Life
2.67 x 4.25 x 1.29 in.
>88% Typical Efficiency
5, 9, 12, 15, 18, 24, 48 Vdc Models
Medical and ITE Safety Compliant

SLE60SPD **60 W (3A)** NEW

USB-C output port
4th Edition EMC Compliance
Wall-plug and Desktop Versions
Medically-approved USB-PD
Efficiency Level VI, CoC Tier II compliant
Medical and ITE Safety Compliant

SLE65 **65 W**

100K Hours MTBF
Up to 88% Efficiency
1.30 x 3.81 x 1.99 in.
9 to 36 Vdc Models
DoE Level VI & CoC Version 5, Tier 2 Efficiency

ME90/TE90 **90 W**

>250K Hours MTBF
>7 Year E-Cap Life
2.58 x 5.9 x 1.34 in.
>88% Typical Efficiency
12, 15, 18, 24 Vdc Models
Medical and ITE Safety Compliant

SLE90 **90 W**

100K Hours MTBF
Up to 88% Efficiency
1.30 x 3.81 x 1.99 in.
9 to 36 Vdc Models
Medical and ITE Safety Compliant
DoE Level VI & CoC Version 5, Tier 2 Efficiency

GE150 **150 W**

>250K Hours MTBF
>7 Year E-Cap Life
4.25 x 8.43 x 1.85 in.
12, 15, 24, 28, 48 Vdc Models
DoE Level VI & CoC Version 5, Tier 2 Efficiency

ME240/TE240 **240 W**

>250K Hours MTBF
>7 Year E-Cap Life
4.25 x 8.43 x 1.85 in.
12, 15, 24, 28, 48 Vdc Models
Medical and ITE Safety Compliant
DoE Level VI & CoC Version 5, Tier 2 Efficiency

KT1001

Bladekit for SLE Series
KT1001AU - Australia
KT1001CH - China
KT1001EU - European
KT1001US - United States
KT1001UK - United Kingdom
KT1001K - EU, UK, and AU
KT1001A - EU, UK, AU, US

Alternate output connectors are available

Consult with representative for configuration option including input and output connectors, color, special labeling and additional certifications