


# ARTESYN ATA SERIES

6 Watts

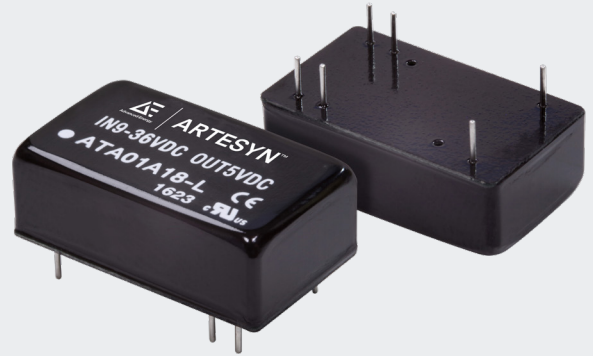

Advanced Energy's Artesyn ATA series 6 watt isolated DC-DC converters are suitable for a diverse range of low power applications, including data communication, telecommunication and computer peripheral equipment, industrial automation and mobile battery-powered systems. The series comprises 14 variants, each of which is available in a mini dual-in-line package for through-hole mounting.

## AT A GLANCE

### Total Power

6 W

### Input Voltage

12, 24 or 48 V

### # of Outputs:

Single and Dual

## SPECIAL FEATURES

- Ultra compact DIP package  
23.8 x 13.7 x 8.0 mm  
(0.94 x 0.54 x 0.31 inches)
- Efficiency up to 86%
- I/O-isolation 1500 VDC
- Ultra-wide 4:1 input range
- Operating temperature range  
-40°C to +90°C
- Input filter meets EN 55022, class A  
and FCC, level A
- Three year product warranty
- UL/cUL/IEC/EN 62368-1 (60950-1)  
safety approval and CE marking

## SAFETY

- UL/cUL/IEC/EN 62368-1 (60950-1)  
Safety Approval & CE Marking

## ELECTRICAL SPECIFICATIONS

| Input                    |                            |
|--------------------------|----------------------------|
| Input range              | 9 to 36 VDC, 18 to 75 VDC  |
| Efficiency               | 86% @ 24 Vo                |
| Output                   |                            |
| Voltage tolerance        | ±2.0%                      |
| Line regulation          | 0.8%                       |
| Load regulation          | 1.0%                       |
| Noise/ripple             | 55 mV                      |
| Overload protection      | 150% typ of Io max, Hiccup |
| Short circuit protection | Hiccup mode                |
| Switching frequency      | 370 KHz                    |
| Isolation                |                            |
| I/O isolation            | I/O: 1500 VDC              |
| Insulation resistance    | 1000 Mohm                  |
| Insulation capacitance   | 500 pF                     |


## ENVIRONMENTAL SPECIFICATIONS

|                                     |                          |
|-------------------------------------|--------------------------|
| Operating ambient temperature range | -40°C to +90°C           |
| Storage temperature                 | -50°C to +125°C          |
| Humidity                            | 5% to 95% non-condensing |
| MTBF                                | TBD Khrs calculated      |

## ORDERING INFORMATION

| Part Number | Input Voltage | Output Voltage | Output Current | Efficiency | Power |
|-------------|---------------|----------------|----------------|------------|-------|
| ATA01F18-L  | 9-36 VDC      | 3.3 V          | 1200 mA        | 78%        | 4 W   |
| ATA01A18-L  | 9-36 VDC      | 5 V            | 1200 mA        | 82%        | 6 W   |
| ATA01B18-L  | 9-36 VDC      | 12 V           | 500 mA         | 85%        | 6 W   |
| ATA01C18-L  | 9-36 VDC      | 15 V           | 400 mA         | 85%        | 6 W   |
| ATA01H18-L  | 9-36 VDC      | 24 V           | 250 mA         | 86%        | 6 W   |
| ATA01BB18-L | 9-36 VDC      | ±12 V          | 250 mA         | 85%        | 6 W   |
| ATA01CC18-L | 9-36 VDC      | ±15 V          | 200 mA         | 86%        | 6 W   |
| ATA01F36-L  | 18-75 VDC     | 3.3 V          | 1200 mA        | 78%        | 4 W   |
| ATA01A36-L  | 18-75 VDC     | 5 V            | 1200 mA        | 82%        | 6 W   |
| ATA01B36-L  | 18-75 VDC     | 12 V           | 500 mA         | 85%        | 6 W   |
| ATA01C36-L  | 18-75 VDC     | 15 V           | 400 mA         | 85%        | 6 W   |
| ATA01H36-L  | 18-75 VDC     | 24 V           | 250 mA         | 86%        | 6 W   |
| ATA01BB36-L | 18-75 VDC     | ± 12 V         | 250 mA         | 85%        | 6 W   |
| ATA01CC36-L | 18-75 VDC     | ± 15 V         | 200 mA         | 86%        | 6 W   |

MECHANICAL DIMENSIONS

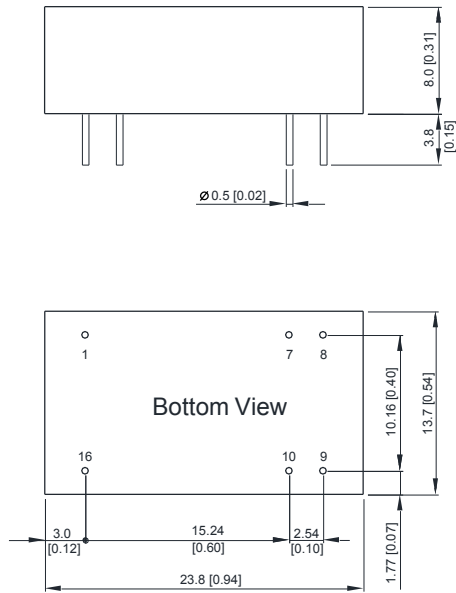

- All dimensions in mm (inches)
- Tolerance: X.X±0.5 (X.XX±0.02)  
X.XX±0.25 (X.XXX±0.01)
- Pin diameter: 0.5±0.05 (0.02±0.002)

PIN CONNECTORS

| Pin No. | Single Output | Dual Output   |
|---------|---------------|---------------|
| 1       | -Vin          | -Vin          |
| 7       | No Connection | No Connection |
| 8       | No Connection | Common        |
| 9       | +Vout         | +Vout         |
| 10      | -Vout         | -Vout         |
| 16      | +Vin          | +Vin          |



For international contact information,  
visit [advancedenergy.com](https://www.advancedenergy.com).

[powersales@aei.com](mailto:powersales@aei.com) (Sales Support)  
[productsupport.ep@aei.com](mailto:productsupport.ep@aei.com) (Technical Support)  
+1 888 412 7832

## ABOUT ADVANCED ENERGY

Advanced Energy (AE) has devoted more than three decades to perfecting power for its global customers. AE designs and manufactures highly engineered, precision power conversion, measurement and control solutions for mission-critical applications and processes.

Our products enable customer innovation in complex applications for a wide range of industries including semiconductor equipment, industrial, manufacturing, telecommunications, data center computing, and medical. With deep applications know-how and responsive service and support across the globe, we build collaborative partnerships to meet rapid technological developments, propel growth for our customers, and innovate the future of power.

PRECISION | POWER | PERFORMANCE

---

Specifications are subject to change without notice. Not responsible for errors or omissions. ©2024 Advanced Energy Industries, Inc. All rights reserved. Advanced Energy®, AE® and Artesyn™ are U.S. trademarks of Advanced Energy Industries, Inc.